

MANUAL TROLLEY 10 T



- **Mechanical and ready to go.**

The reliability, operating smoothness, and safety of your hoist depend on the trolley. Heat-treated steel wheels, sealed bearings, and a low bend radius are just a few of the benefits of a Kito geared trolley.

- **Manually operated**

Perfect for traversing a load when electrical power is not needed or available, Kito's TSG geared trolleys can be combined with almost any Kito hoist.

- **STAMPED STEEL SIDE PLATES**


Designed to be lighter and easier to install, TSG model 5 ton to 10 tons trolleys are specifically designed to be robust and durable, without unnecessary weight and bulk.

- **LOW MINIMUM BENDING RADIUS**

For curved beams where sharp bends are required, Kito's TSG trolleys allow for a low minimum bend radius.

- **Fits Tapered Beams or Flat Flanged Beams**

The TSG Trolley's wheels are adjustable to work with flat tapered and flanged beams, allowing you to use existing equipment without customization. Permanently lubricated ball bearings also increase reliability and provide smooth operation when traversing a load.

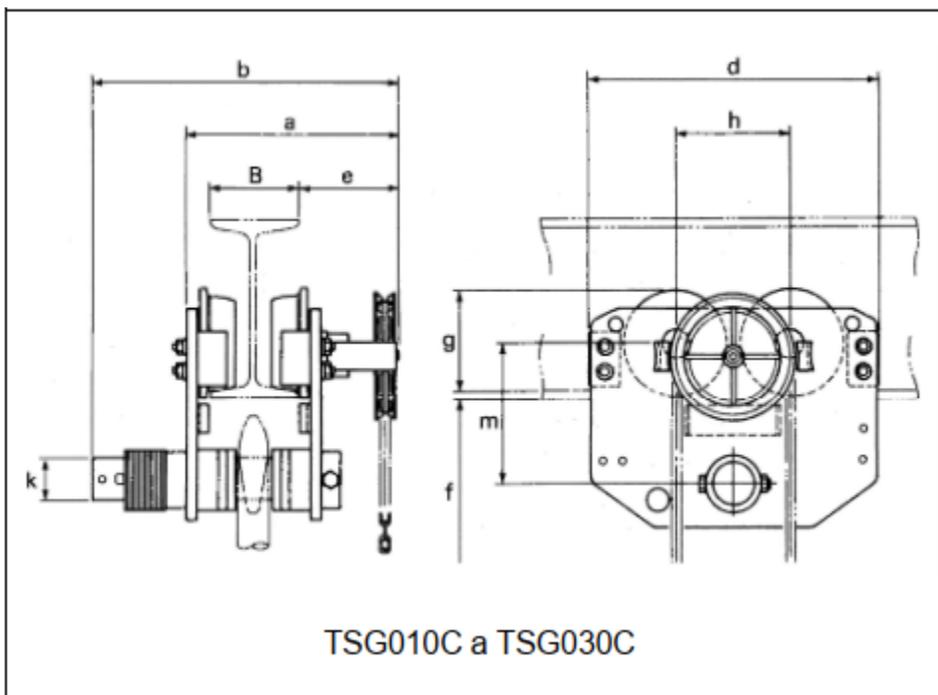

Cap. (t)	Código do Produto	Dimensão (mm)													
		a (max)*		b		d	e		f		g	h	k	l	m
		C	E	C	E		C	E	C	E					
7.5	TSG075C,E	439	549	523	633	492	178	288	3.7	3.2	170	196.5	φ70	-	230
10	TSG100C	439	549	523	633	492	178	288	3.7	3.2	170	196.5	φ70	-	230

Tabela 2-6 Dimensões do Suspensor C

Capacidade do Trole (t)	Capacidade do Suspensor C (t)	Dimensão (mm)			
		a	b	h	e
0.5	0.5	26	33	14	14
1	1	28	37	18	18
1.5	2	32	40	22	22
2					
2.5	2.5	36	44	27	25
3	3	40	48	24	30
5	5	60	70	33	36